

Instructions for assembly and installation of the StarStrand 150w, 320w 480W 24V direct wire drivers and Starstrand 75w and 150w 12V direct wire drivers.

WARNING: BE SURE THE ELECTRICITY TO THE WIRE YOU ARE WORKING ON IS SHUT OFF, EITHER THE FUSE REMOVED OR THE CIRCUIT BREAKER OFF.

WARNING: USE OF OTHER MANUFACTURERS COMPONENTS WILL VOID WARRANTY, U.L. AND/ OR ETL LISTING, AND CREATE A POTENTIAL SAFETY HAZARD.

WARNING: RISK OF ELECTRIC SHOCK. THIS DRIVER IS FOR INDOOR USE ONLY.

WARNING: DO NOT ENERGIZE ELECTRICAL SUPPLY CIRCUIT TO DRIVER(S) UNTIL ALL CONNECTIONS HAVE BEEN MADE AND TESTED ACCORDING TO NATIONAL ELECTRICAL CODES AND ALL LOCAL ELECTRICAL CODES. IF YOU ARE UNCLEAR ON HOW TO PROCEED, CONTACT A QUALIFIED ELECTRICIAN.

CAUTION: RISK OF FIRE: 12V LED TAPE MUST NOT BE USED IN A 24V SYSTEM, and 24V LED TAPE MUST NOT BE USED IN A 12V SYSTEM

CAUTION: THE LOCATION AND NUMBER OF DRIVERS INSTALLED ON RESIDENTIAL CIRCUIT BREAKERS MAY CAUSE THE BREAKERS TO TRIP WHEN THE LIGHTING LOAD IS ENERGIZED. IF THIS OCCURS REPLACE THE RESIDENTIAL CIRCUIT BREAKER WITH A BREAKER RATED FOR HIGH IN-RUSH CURRENT.


Driver Installation

Select desired location to mount driver(s). Not in contact with insulation and away from oven or any other source of intense heat and as close as possible to the lighting system to achieve the most efficient operation. Minimum air space around driver needs to be at least 12" on each side. Driver(s) can be mounted vertically or horizontally. After firmly mounting the driver(s) select a listed connector (not furnished) appropriate to the type of electrical supply cable at site. Remove terminal cover and knockout from driver(s) and fasten connector to terminal cover and secure in place with connector.


Line Voltage Wiring and Grounding

Connect supply ground to ground terminal marked with the ground symbol. Connect wire common (white) supply wire to common terminal marked with the N symbol. Connect wire line (black) supply wire to the line voltage terminal marked with the L symbol.

Direct Wire Driver Wiring Guide

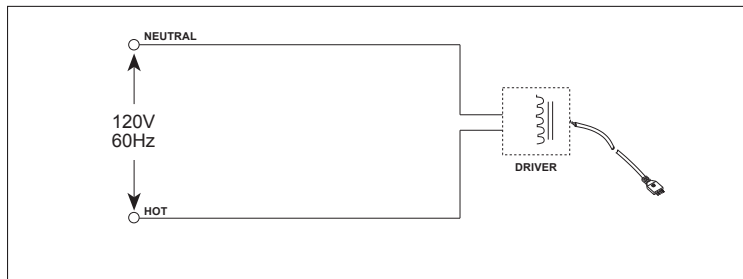

Direct Wire Driver Terminals

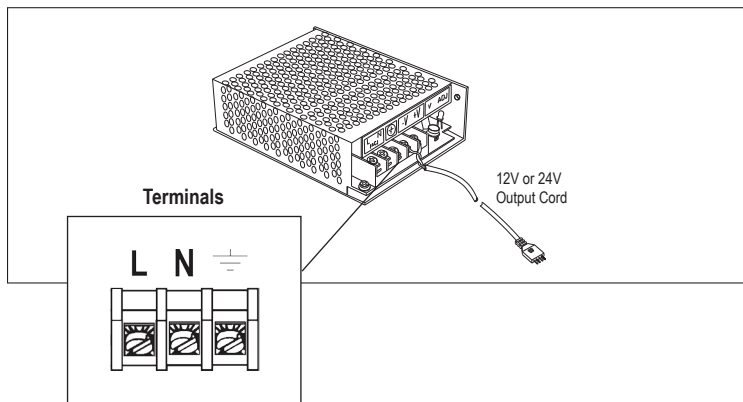

2 YEAR LIMITED WARRANTY

StarStrand™ LED Tape Lighting System components will be warranted for normal use for 2 years while the original purchaser owns it. Normal use means residential non-commercial use for no more than 6 hours per day in an environment that does not exceed 77°F.

Maxim Lighting International will, at its election, repair, replace or make appropriate adjustment where Maxim Lighting International inspection discloses any such defects occurring in normal usage within five (5) years after date of shipment. Maxim Lighting International is not responsible for removal or installation costs. This warranty is limited to the repair or replacement of the product only and that Maxim Lighting International is not responsible for any labor incurred. Use of incorrect installation methods and/or bulb wattage will void the warranty.

To obtain warranty service contact Maxim Lighting International either through your Dealer, Contractor or E-tailer, or by writing Maxim Lighting International, Attn: Customer Service Department, 253 North Vineland Avenue, City of Industry, CA 95746, USA, or by calling 1-800-486-2946 from within the USA and 1-626-956-4200 outside of the USA.

DISCLAIMER OF IMPLIED WARRANTY

IMPLIED WARRANTIES INCLUDING THAT OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY LIMITED IN DURATION TO THE DURATION OF THIS WARRANTY. MAXIM LIGHTING INTERNATIONAL AND/OR SELLER DISCLAIMS ANY LIABILITY FOR SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES.

Some states/provinces do not allow limitations on how long an implied warranty lasts, or the exclusion or limitation of special, incidental or consequential damages, so these limitations and exclusions may not apply to you. This warranty gives you specific legal rights. You may also have other rights which vary from state/province to state/province.

