

WAFER LED LINEAR | SURFACE MOUNT

57746 / 57747


- Edge-Lit Technology
- Aluminum extruded body for better heat dissipation
- Available in 3000K / 4000K color temperature
- Dimmable with ELV dimmer at 120V
- Approved for use in closets and storage spaces
- Suitable for Closets according to NEC Section 410.8 & 410.16
- 120-277 Input Voltage
- Energy Star listed
- Easy to install: Fits 4" Outlet Box
- Not recommended for pancake box
- Suitable for Wet location
- ETL/cETL, IP65

Job Name : _____
 Job Type : _____
 Quantity : _____
 Comments : _____



PRODUCT DESCRIPTION

Wafer was designed for the discriminate consumer who wants the low profile look of recessed without the high cost. Manufactured of die cast aluminum, Wafer brings ultimate heat dissipation to its edge lit technology. Edge lighting gives very even light distribution while dispersing heat over a larger area. The result of this is longer LED life and better light diffusion.

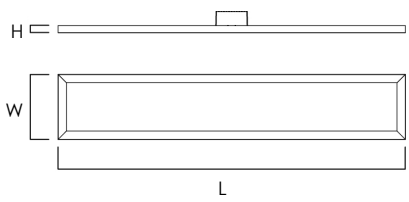

MEASUREMENTS

DIMENSIONS : 48"L x 4.5"W x 0.5"H
 HANGING WEIGHT : 3.97 lb MAX OH : 0.5"
 HCO : 0.5" MIN OH : 0.5"
 BP Width : 4.1"

LAMPING

INPUT VOLTAGE : 120-277V
 LUMENS : 3200 Rated (2500 Del.)
 BULB : 36W PCB LED (Integrated)
 DIMMABLE : ELV Dimmer at 120V
 CRI : 90+

Model	Color Temp.
57746	3000K
57747	4000K

FINISHES OPTIONS:

White (WT)



MATERIAL:

Aluminum
 PMMA Acrylic Diffuser

RATINGS:

Closets Rated: NEC 410.8 & 410.16
 ETL/cETL IP65
 Wet Location
 Energy Star



ADDITIONAL:

RATED LIFE: 50,000 Hours
 OPERATING TEMP: -20° C (-4°), 40° C (104° F)
 PHOTOMETRIC: Report Found Online

Always consult a qualified electrician before installing any lighting product



WESTERN DISTRIBUTION CENTER (HEADQUARTER)
 253 NORTH VINELAND AVE | CITY OF INDUSTRY, CA 91746

EASTERN DISTRIBUTION CENTER
 4200 SHIRLEY DR. | ATLANTA, GA 30336

P. 626.956.4200 | F. 626.956.4225 | maximlighting.com