

# Low Profile LED | 87598


- 3000K Color Temperature
- CRI 80+
- Input Voltage 100V - 277V
- Non Dimmable
- Emergency backup mode gives 25% illumination for up to 3 hours.

Job Name : \_\_\_\_\_  
Job Type : \_\_\_\_\_  
Quantity : \_\_\_\_\_  
Comments : \_\_\_\_\_



## PRODUCT DESCRIPTION

Our economy line of LED flush mounts has just been improved. The base is now made of steel for better heat dissipation, as well as the ability to offer not only Bronze, but White and Satin Nickel as a finish. We still offer the PMMA lens for extreme durability and maximum light transmission.

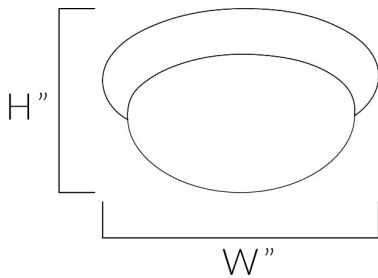


## MEASUREMENTS

DIMENSION : 13.75" L x 13.75" W x 2.5" H  
HANGING WEIGHT : 1.78 lb

## LAMPING

INPUT VOLTAGE : 120-277V  
LUMENS : 1,200 Rated (984 Del.)  
BULB : 1 x 12W LED PCB Integrated , 12W Total  
BULB INCLUDED : (Integrated)  
DIMMABLE : No  
CRI : 80+ CRI  
COLOR\_TEMP : 3000K

## FINISHES OPTION



## GLASS

White WT

## MATERIAL

Steel

## RATINGS

cETLus  
Dry Location



## ADDITIONAL

RATED LIFE 40000 Hours  
OPERATING TEMPERATURE:  
-20°C (-4°F), 40°C (104°F)

Always consult a qualified electrician before installing any lighting product.



**WESTERN DISTRIBUTION CENTER (HEADQUARTER)**  
253 NORTH VINELAND AVE | CITY OF INDUSTRY, CA 91746

**EASTERN DISTRIBUTION CENTER**  
4200 SHIRLEY DR. | ATLANTA, GA 30336

P. 626.956.4200 | F. 626.956.4225 | maximlighting.com