

CORONA I FANDELIER

60002SN

- ETL/cETL
- Title 20 listed
- LED 3000K
- Suitable for Dry location
- Wall mountable (remote control included)

Job Name : _____
 Job Type : _____
 Quantity : _____
 Comments : _____



ACCESSORIES (Sold Separately)



FCT6000WT

Fandelier Wall Control

PRODUCT DESCRIPTION

The Corona Fandelier features a cage of artfully bent Satin Nickel that houses the three innovatively curved fan blades. Its streamlined styling is paired with a high-powered LED ring offering additional downlight while circulation the air.

- Always consult a qualified electrician before installing any lighting product
- Installation Requirements:
Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding at least 35 lbs

FINISHES OPTIONS:

Satin Nickel (SN)



MATERIAL:

Steel
 Polypropelene Fan Blades
 Aluminum

INCLUDES

- Wall Mountable Remote Control
- 1 x 6" Downrod

DOWNROD OPTIONS

- 18" (FRD0118SN)
- 24" (FRD0124SN)
- 30" (FRD0130SN)
- 36" (FRD0136SN)


RATINGS:

ETL cETL
 Dry Location
 Title 20



ADDITIONAL:

RATED LIFE: 35,000 Hours
 OPERATING TEMP: -20° C (-4°), 40° C (104° F)
 LIGHTING DIRECTION: Down

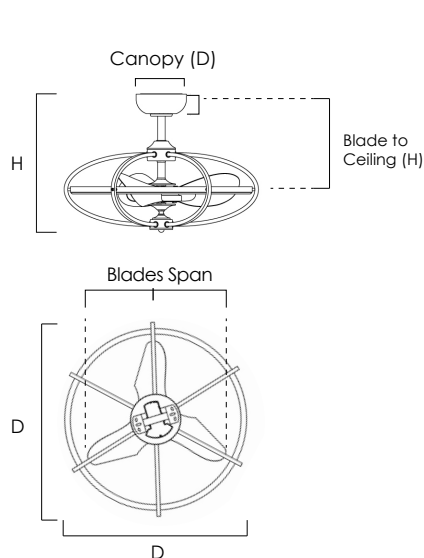

MEASUREMENTS

DIMENSIONS : 27.25"D x 19.5"H
 CANOPY : 7"D x 2.75"H
 HANGING WEIGHT : 15.86 lb
 BLADE : 3 Blades with 22" span
 BLADE PITCH : Varying
 BLADE TO CEILING : 11"H

LAMPING

INPUT VOLTAGE : 120V
 LUMENS : 3895 Rated (2000 Del.)
 BULB : 46W PCB LED (Integrated)
 DIMMABLE : Yes
 CRI : 80+
 COLOR TEMP : 3000K
 MOTOR TYPE : DC Motor

AIRFLOW

SPEEDS : 6
 AIRFLOW CFM : 5057
 ELECTRICITY USE : 31.90W
 AIRFLOW EFFICIENCY: 158.5



WESTERN DISTRIBUTION CENTER (HEADQUARTER)

253 NORTH VINELAND AVE | CITY OF INDUSTRY, CA 91746

EASTERN DISTRIBUTION CENTER

4200 SHIRLEY DR. | ATLANTA, GA 30336

P. 626.956.4200 | F. 626.956.4225 | maximlighting.com