

# SOLSTICE I FANDELIER

## 60006SN

- ETL/cETL
- Title 20 listed
- LED 3000K
- Suitable for Dry location
- Wall mountable (remote control included)

Job Name : \_\_\_\_\_  
Job Type : \_\_\_\_\_  
Quantity : \_\_\_\_\_  
Comments : \_\_\_\_\_



### ACCESSORIES (Sold Separately)



#### FCT6000WT

Fandelier Wall Control

### PRODUCT DESCRIPTION

The Solstice collection houses three innovatively curved fan blades within a cage of artfully bent Satin Nickel channel to create a classic form in light. Its architecturally contemporary styling is paired with high-powered LED lighting making it functional and fantastic for transitional and modern settings.

- Always consult a qualified electrician before installing any lighting product
- Installation Requirements:  
Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding at least 35 lbs

### MEASUREMENTS


DIMENSIONS : 34.25"D x 23.5"H  
HANGING WEIGHT : 8.19 lb  
BLADE : 3 Blades with 22" span  
BLADE PITCH : Varying  
BLADE TO CEILING : 14"H

### LAMPING

INPUT VOLTAGE : 120V  
LUMENS : 5200  
BULB : (8) 7W PCB LED (Integrated), 56W Total  
DIMMABLE : Yes  
CRI : 80+  
COLOR TEMP : 3000K  
MOTOR TYPE : DC Motor

### AIRFLOW

SPEEDS : 6  
AIRFLOW CFM : 5057  
ELECTRICITY USE : 31.90W  
AIRFLOW EFFICIENCY: 158.5

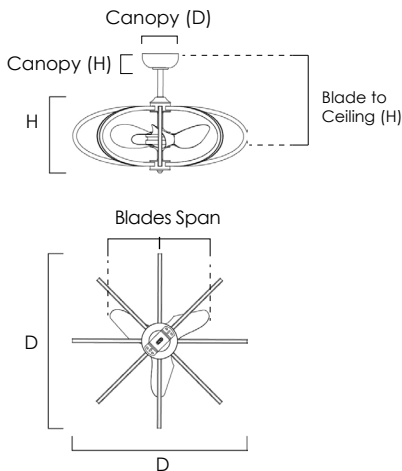

### FINISHES OPTIONS:

Satin Nickel



### MATERIAL:

Steel  
Polypropelene Fan Blades  
Aluminum

### INCLUDES

- Wall Mountable Remote Control
- 1 x 8" Downrod

### DOWNROD OPTIONS

- 18" (FRD0118SN)
- 24" (FRD0124SN)
- 30" (FRD0130SN)
- 36" (FRD0136SN)

### RATINGS:

ETL cETL  
Dry Location  
Title 20



### ADDITIONAL:

RATED LIFE: 35,000 Hours  
OPERATING TEMP: -20° C (-4°), 40° C (104° F)  
LIGHTING DIRECTION: Up



### WESTERN DISTRIBUTION CENTER (HEADQUARTER)

253 NORTH VINELAND AVE | CITY OF INDUSTRY, CA 91746

### EASTERN DISTRIBUTION CENTER

4200 SHIRLEY DR. | ATLANTA, GA 30336

P. 626.956.4200 | F. 626.956.4225 | maximlighting.com