

AMBIENCE | FANDELIER

60009BZGLD

- ETL/cETL
- Title 20 listed
- LED 3000K
- Suitable for Damp location
- Wall mountable (remote control included)

Job Name : _____
Job Type : _____
Quantity : _____
Comments : _____



ACCESSORIES (Sold Separately)




FCT6000WT

Fandelier Wall Control

PRODUCT DESCRIPTION

Modern, yet warm the Ambience Fandelier is finished in a dark bronze exterior and gold paint softly illuminated on the inside. Three uniquely shaped blades silently circulate the air at any of the six adjustable speeds in any indoor or outdoor space. Eight LEDs are nestled within the contoured arms to veil the fan with their glow. A warm and inviting ambience is just what the Ambience Fandelier delivers.

- Always consult a qualified electrician before installing any lighting product
- Installation Requirements:
Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding at least 35 lbs

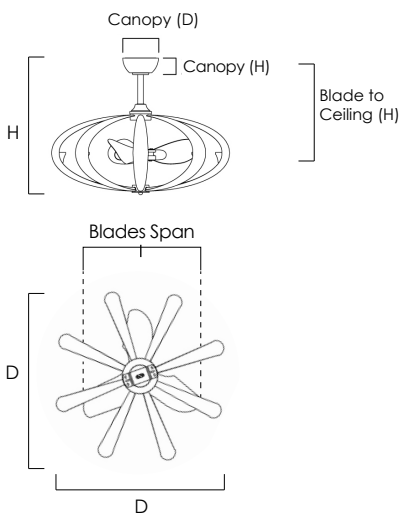

MEASUREMENTS

DIMENSIONS : 33.5"D x 25.75"H
CANOPY : 6.75"D x 2.75"H
HANGING WEIGHT : 31.24 lb
BLADE : 3 Blades with 22"span
BLADE PITCH : Varying
BLADE TO CEILING : 15.25"H

LAMPING

INPUT VOLTAGE : 120V
LUMENS : 5760
BULB : (8) 8W PCB LED (Integrated), 64W Total
DIMMABLE : Yes
CRI : 80+
COLOR TEMP : 3000K
MOTOR TYPE : DC Motor

AIRFLOW

SPEEDS : 6
AIRFLOW CFM : 5057
ELECTRICITY USE : 31.90W
AIRFLOW EFFICIENCY: 158.5

FINISHES OPTIONS:

Bronze / Gold (BZGLD)



MATERIAL:

Steel
Polypropelene Fan Blades

INCLUDES

- Wall Mountable Remote Control
- 1 x 8" Downrod

DOWNROD OPTIONS

- 18" (FRD0118BZGT)
- 24" (FRD0124BZGT)
- 30" (FRD0130BZGT)
- 36" (FRD0136BZGT)

RATINGS:

ETL cETL
Damp Location
Title 20



ADDITIONAL:

RATED LIFE: 35,000 Hours
OPERATING TEMP: -20° C (-4°), 40° C (104° F)
LIGHTING DIRECTION: Up



WESTERN DISTRIBUTION CENTER (HEADQUARTER)

253 NORTH VINELAND AVE | CITY OF INDUSTRY, CA 91746

EASTERN DISTRIBUTION CENTER

4200 SHIRLEY DR. | ATLANTA, GA 30336

P. 626.956.4200 | F. 626.956.4225 | maximlighting.com