

TRIM | 0-10V LED FLUSH MOUNT

57880 | 57881 | 57882 | 57883 | 57884 | 57885 | 57894 | 57895

- Die Cast Aluminum
- Size options between 5", 7" and 9"
- Ultra-thin 1" height with less than 1/4" trim
- Available in 3000k (Other CCT available on request)
- Suitable for Closets according to NEC Section 410.8 & 410.16
- Available in White (WT), Black (BK), Polished Chrome (PC) and Satin Nickel (SN)
- Easy to install: fits in 3-0 and 4-0 Outlet Box
- Pendant light accessory available (sold separately)
- Black-Lit LED Technology
- Suitable for Wet Location, for use on ceilings outdoor and above showers
- Dimmable with 0-10V, Triac or ELV Dimmers
- ETL/cETL

Job Name : _____
 Job Type : _____
 Quantity : _____
 Comments : _____



Trim LED 7"
*Emergency Back up




(57894WTWT)



(57895WTWT)

PRODUCT DESCRIPTION

Thin discs of evenly illuminated LED create the impression of recessed lighting. The die-cast aluminum housings are available in White, Black, Satin Nickel, and Polished Chrome all with a thoughtfully recessed White polycarbonate diffuser. High efficiency and good color rendering make this a perfect choice for your next project. Use the optional pendant adapter to convert any size to a hanging fixture.

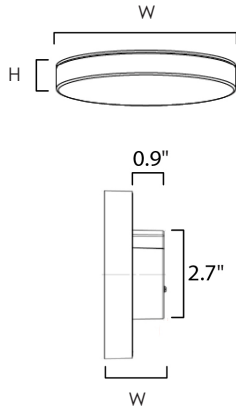

MEASUREMENTS

MODEL	DIMENSION
57880	5" W x 0.5"H
57881	5" W x 0.5"H
57882	7" W x 0.5"H
57883	7" W x 0.5"H
57884	9" W x 0.5"H
57885	9" W x 0.5"H
* 57894	7" W x 2"H
* 57895	7" W x 2"H


LAMPING

MODEL	WATTAGE & TYPE	COLOR TEMP	CRI	INPUT	DIMMABLE	LUMENS	
						RATED	DEL
57880	12.5W LED (Integrated)	3000K	90+	120-277V	0-10V	1250	1000
57881	12.5W LED (Integrated)	4000K	90+	120-277V	0-10V	1250	1000
57882	15W LED (Integrated)	3000K	90+	120-277V	0-10V	1600	1300
57883	15W LED (Integrated)	4000K	90+	120-277V	0-10V	1600	1300
57884	18W LED (Integrated)	3000K	90+	120-277V	0-10V	2000	1600
57885	18W LED (Integrated)	4000K	90+	120-277V	0-10V	2000	1600
* 57894	15W LED (Integrated)	3000K	90+	120-277V	0-10V	1750	1400
* 57895	15W LED (Integrated)	4000K	90+	120-277V	0-10V	1750	1400

* EMERGENCY BACK-UP BATTERY INCLUDED MINIMUM 15 HOURS FOR FULL CHARGE. LASTS 1.5 HOURS ON BATTERY

FINISH OPTIONS

- Black (BK)
- Satin Nickel (SN)
- White (WT)



DIFFUSER

White Polycarbonate

MATERIAL

Polycarbonate + Aluminum

AVAILABLE SIZES

5" | 7" | 9"

RATINGS & CERTIFICATIONS

cETLus
 Wet Location
 Energy Star
 JA8 Listed



ADDITIONAL

RATED LIFE 50000 Hours
 OPERATING TEMPERATURE:
 -20°C (-4°F), 40°C (104°F)
 WIRE LENGTH: 8" L

PHOTOMETRIC:
 Report Found Online

Always consult a qualified electrician before installing any lighting product



WESTERN DISTRIBUTION CENTER (HEADQUARTER)
 253 NORTH VINELAND AVE | CITY OF INDUSTRY, CA 91746

EASTERN DISTRIBUTION CENTER
 101 GARDNER PARK | PEACHTREE CITY, GA 30269

P. 626.956.4200 | F. 626.956.4225 | maximlighting.com