


# COUNTERMAX MX-L-120-3K BASIC I UNDERCABINET 3K BASIC

89892 / 89893 / 89894 / 89895 / 89896 / 89897

- 3 Color Temperature Options: 4000K, 3000K, and 2700K
- Dimmable using Triac and ELV Dimmers
- Linkable end-to-end or with MX Interlink cord
- Link up to 750 max watts from one supply
- 50,000 hours rated life
- 120° rotation
- CRI 90+
- Suitable for Dry location
- Suitable for Closets according to NEC Section 410.8 & 410.16( C ) 5

Job Name : \_\_\_\_\_  
 Job Type : \_\_\_\_\_  
 Quantity : \_\_\_\_\_  
 Comments : \_\_\_\_\_

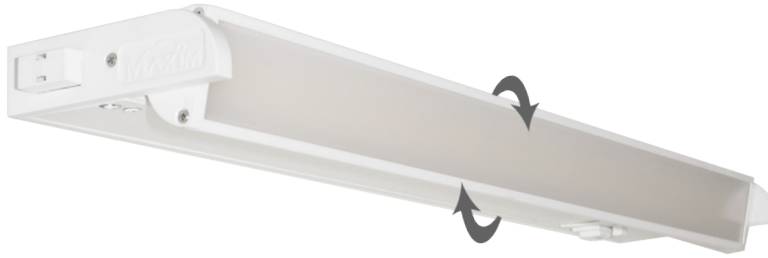


## PRODUCT DESCRIPTION

Switch between 3 color temperatures: 4000K, 3000K, and 2700K. All in a 90 CRI for accurate color rendering. The 3K has a patented gimbal designed to allow light to be directed where desired as well as a patented LED strip for even light distribution.



- Patent gimbals to direct illumination



## MEASUREMENTS

MODEL	DIMENSION	HANGING WEIGHT	CRI
89892	6"L x 3.5"W x 1"H	0.36 lb	90+
89893	12"L x 3.5"W x 1"H	1.32 lb	90+
89894	18"L x 3.5"W x 1"H	1.32 lb	90+
89895	24"L x 3.5"W x 1"H	2.26 lb	90+
89896	30"L x 3.5"W x 1"H	2.84 lb	90+
89897	36"L x 3.5"W x 1"H	3.26 lb	90+

## LAMPING

MODEL	BULB TYPE	COLOR TEMPERATURE	LUMENS INIT.	DEL	INPUT	DIMMABLE
89892	(1) 3W PCB LED (Integrated)	2700/3000/4000K	200	175	120V	Triac CL
89893	(1) 5W PCB LED (Integrated)	2700/3000/4000K	320	275	120V	Triac CL
89894	(1) 8W PCB LED (Integrated)	2700/3000/4000K	500	450	120V	Triac CL
89895	(1) 12W PCB LED (Integrated)	2700/3000/4000K	750	650	120V	Triac CL
89896	(1) 16W PCB LED (Integrated)	2700/3000/4000K	1000	900	120V	Triac CL
89897	(1) 20W PCB LED (Integrated)	2700/3000/4000K	1250	1100	120V	Triac CL

\*Showing lumens based on White (WT) finish

## INCLUDES

- 3/8" knockouts on back and bottom
- Romex connector
- Mounting screws

Always consult a qualified electrician before installing any lighting product

## FINISHES OPTIONS:

- White (WT)
- Bronze (BZ)
- Satin Nickel (SN)



## MATERIAL:

Aluminum

## AVAILABLE SIZE:

6" | 12" | 18" | 24" | 30" | 36"

## RATINGS:

ETL cETL  
 Dry Location  
 Energy Star  
 CA Title 24



## ADDITIONAL:

RATED LIFE: 40,000 Hours  
 OPERATING TEMP: -20° C (-4°), 40° C (104° F)  
 PHOTOMETRIC: Report Found Online

\*Photometric data is based on 3000K color temperature on White (WT) finish



**WESTERN DISTRIBUTION CENTER (HEADQUARTER)**  
 253 NORTH VINELAND AVE | CITY OF INDUSTRY, CA 91746

**EASTERN DISTRIBUTION CENTER**  
 4200 SHIRLEY DR. | ATLANTA, GA 30336

P. 626.956.4200 | F. 626.956.4225 | maximlighting.com

# COUNTERMAX MX-L-120-3K BASIC I UNDERCABINET 3K BASIC

## ACCESSORIES

Job Name : \_\_\_\_\_

Job Type : \_\_\_\_\_

Quantity : \_\_\_\_\_

Comments : \_\_\_\_\_



**87885 BK, WT**  
MXInterLink4 Direct Wire Box  
2.25"L x 5"W x 1"H



**53255**  
Plastic Wire Clips (Package of 10)  
1"L x 0.5"W x 0.25"H



9" **87876 BK, WT**  
18" **87877 BK, WT**  
24" **87878 BK, WT**  
MXInterLink4 Connector Cord



**87880 BK, WT**  
MXInterLink4 Connector Cord 72"  
72"L x 1"W x 0.5"H